



# AJ EKLIPTA WALL LAMP

AJ Eklipsta Wall Lamp - 5743155372

The fixture emits soft comfortable light. The glass is designed to provide a uniformly lit surface. The three-layer mouth-blown opal glass shade has a transparent edge, providing a decorative halo of light around the fixture.

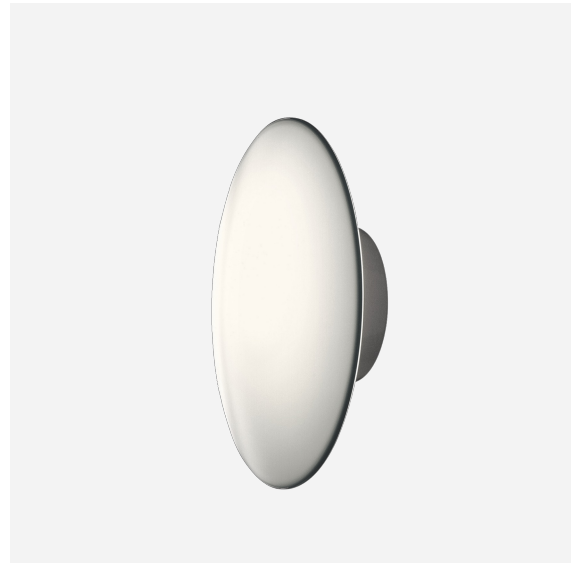

## Arne Jacobsen

Arne Jacobsen was born and raised in Copenhagen. In 1927, he graduated as an architect from the Royal Danish Academy of Fine Arts in Copenhagen. After graduating, he obtained his first job at the office of the City Architect of Copenhagen launching his own office only two years later.



# Product info

## Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

## Information

Only Wall mounted E27 versions for outdoor use. For LED fixtures without glass or LED replacement kits please contact Louis Poulsen. The innovation of the LED technology is constant. The specifications mentioned are based on present technology. Ø220: Compatible with leading edge mains dimmers. Please note that low power consumption on some products can affect dimming properties.

## Mounting

Terminal block: Ø220: 3x2,5mm<sup>2</sup>, Ø350/Ø450: 5x2,5mm<sup>2</sup>. Looping: Approved, Ø220: Max. 3x1,5mm<sup>2</sup>, Ø350/Ø450: Max. 5x1,5mm<sup>2</sup>. Ballast positioning: In ceiling/wall box.

## Finish

White, powder coated. White opal glass.

## Materials

Ceiling/Wall box: Die cast aluminium or spun aluminium. Diffuser: Mouth-blown white opal glass.

## Sizes and weights

width x Height x Length (mm) | 105 x 220 x 220 Max 1.4 kg | 450 x 100 x 450 Max 13.8 kg | 350 x 100 x 350 Max 8.0 kg

## Class

Ingress protection. LED ceiling/wall: IP20. Ø220: IP20. E27 Ø350/450 Ceiling: IP20. E27 Ø350/450 Wall: IP44. Electric shock protection I w. ground.


## Light source

1x60W E27

## Information


Only Wall mounted E27 versions for outdoor use. For LED fixtures without glass or LED replacement kits please contact Louis Poulsen. The innovation of the LED technology is constant. The specifications mentioned are based on present technology.

Ø220: Compatible with leading edge mains dimmers. Please note that low power consumption on some products can affect dimming properties.

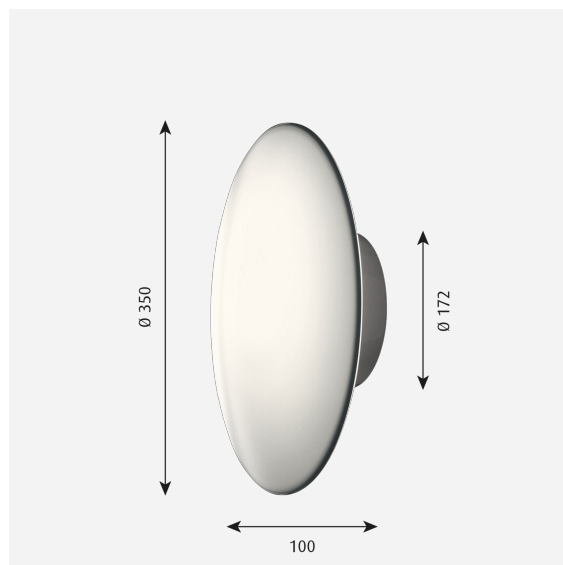


# Light distribution diagrams


Cartesian

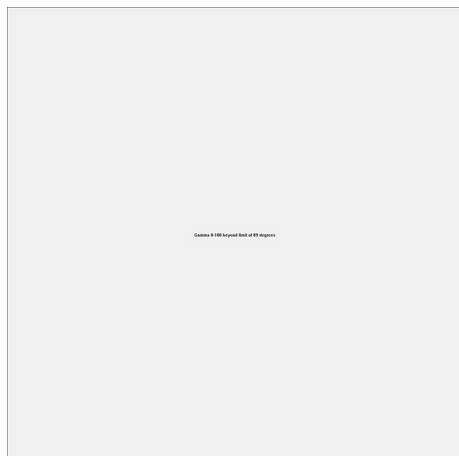

Isolux

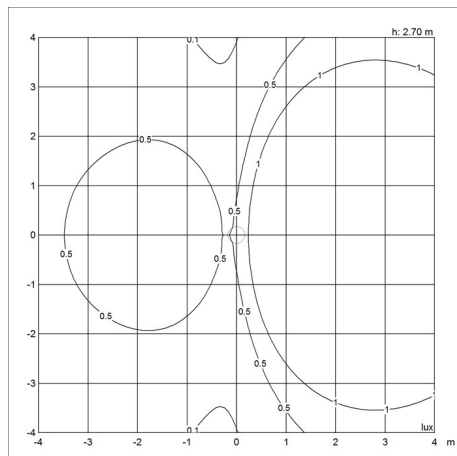

Polar

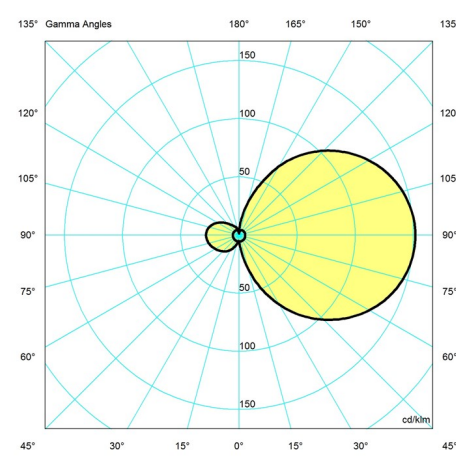

## Spare parts & accessories

| Product                      | Variant number |
|------------------------------|----------------|
| AJ Eklipta Ø220 glass        | 5743590005     |
| AJ Eklipta Ø350 glass        | 5743590018     |
| AJ Eklipta Ø450 glass        | 5743590021     |
| AJ Eklipta Ø220 diffuser KIT | 5743591305     |

## Data specifications

|                 |       |                                     |           |
|-----------------|-------|-------------------------------------|-----------|
| Colour          | White | Length                              | 350       |
| Width           | 350   | Height                              | 100       |
| Built-in Height | -     | IP class                            | 44        |
| Class           | I     | Net Weight                          | 7.2       |
| Standby (W)     | -     | Power Factor (P = 100 % / P = 50 %) | -         |
| Inrush Current  | -     | Light source                        | 1x60W E27 |
| Kelvin          | -     | CRI                                 | -         |

**AJ Eklipta Wall Lamp**

|                         |           |
|-------------------------|-----------|
| SDCM                    | 3         |
| Watt                    | 60        |
| Light control           | -         |
| UGR Transversal / Axial | 12.8/13.7 |
| Driver life             | -         |

|                    |     |
|--------------------|-----|
| Lumen              | 385 |
| Efficacy           | 6   |
| Min. Dim Level (%) | -   |
| L80B50 (hours)     | -   |