



Design Bystrup Arkitekter

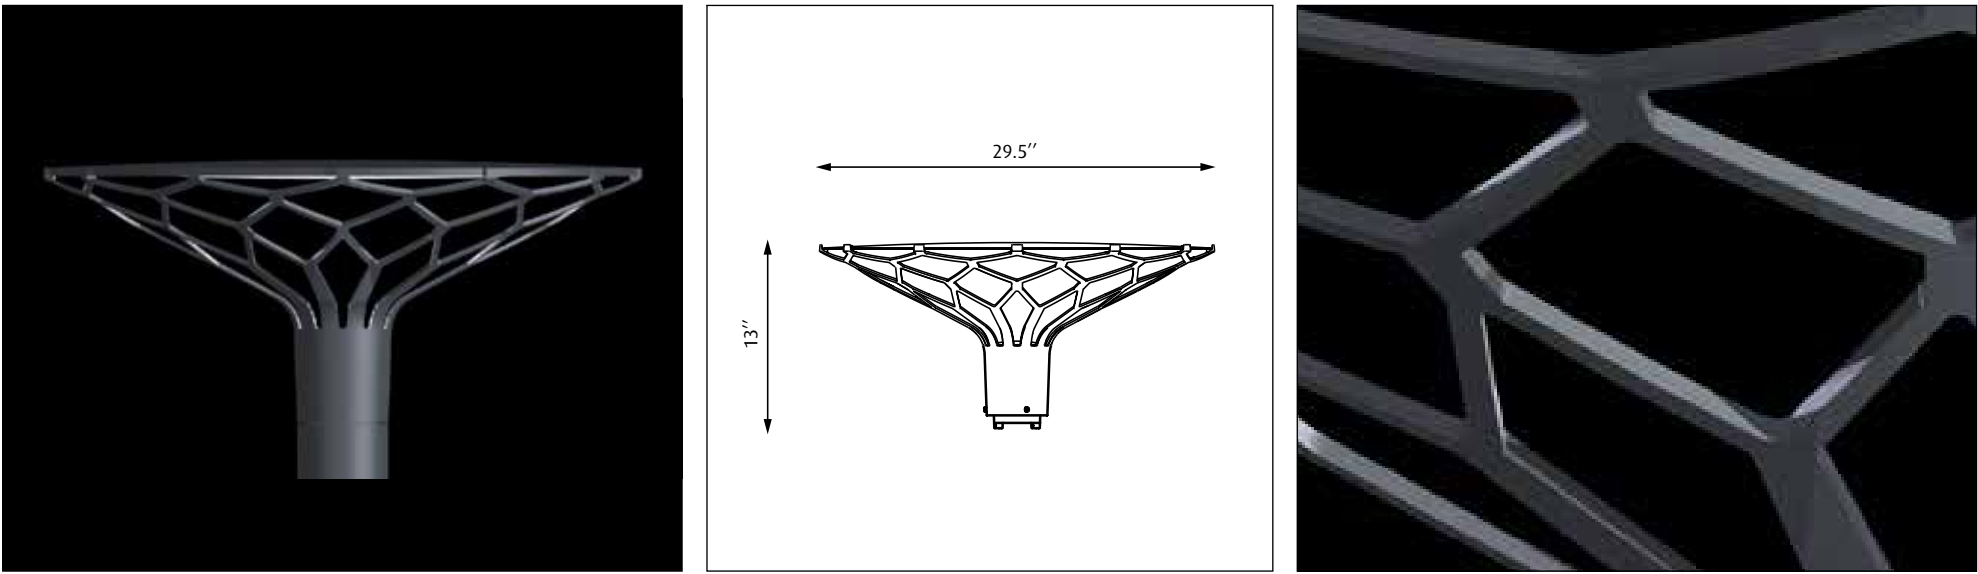

50763-12


Light source	Voltage/frequency	Weight	Wind load area	Electric shock protection	Ingress protection	Impact protection
LED	 120-277V	18 Lbs	0.5 ft²	Cl. I, Grounded	IP66 Wet location	IK09

Recommended cleaning substances:
Wipe off dust with a dry, soft cloth. Remove greasy spots etc. with a soft cloth dampened in lukewarm water (<122° F/ 50° C) with a mild detergent.
Never use detergents containing abrasives and solvents.






Warning: Scouring powder and similar substances will scratch surfaces.

All installation is subject to local code and jurisdiction.
Consult a qualified electrician to ensure correct branch circuit conductor.




The installer must ensure that the foundation is stable and can support the luminaire's weight. The Installer must use proper means to secure the luminaire to the ground.



Due to possibility of personal injury or property damage, always contact a qualified electrician for servicing or repair of this fixture. To avoid risk of electrical shock, personal injury, or death, disconnect power to fixture before servicing.

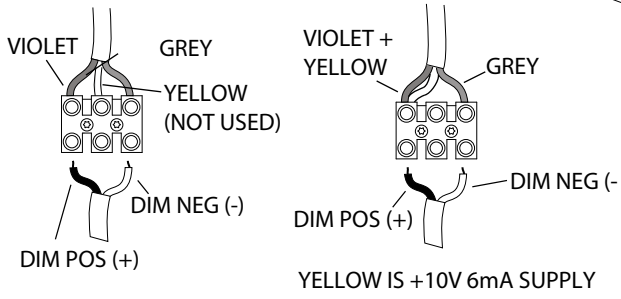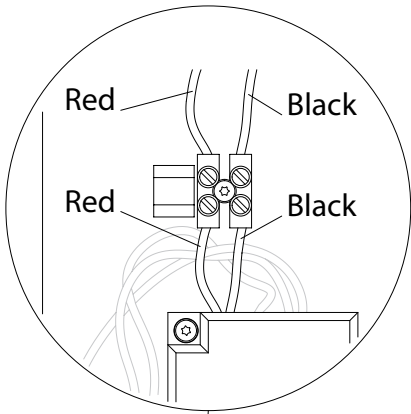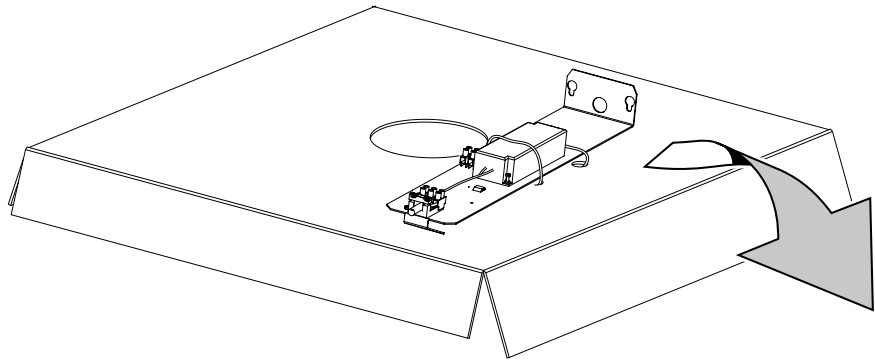

AS SUPPLIED FIXTURE IS SINKING, AND REQUIRES USE OF SOURCING 0-10V CONTROL. TO CONVERT FIXTURE TO SOURCING, SPLICE YELLOW AND VIOLET WIRES TOGETHER.

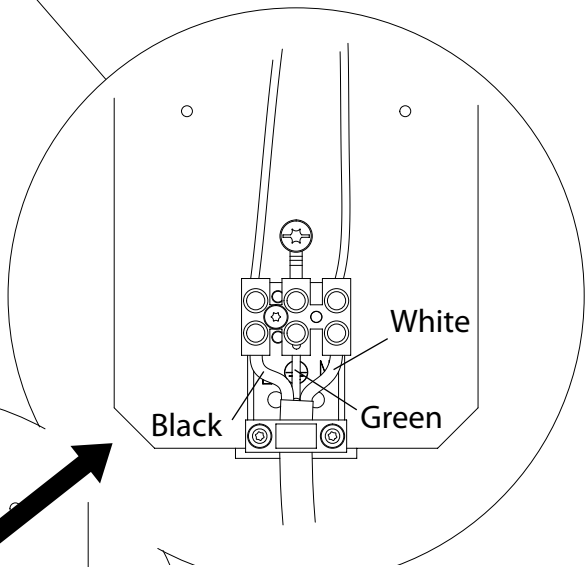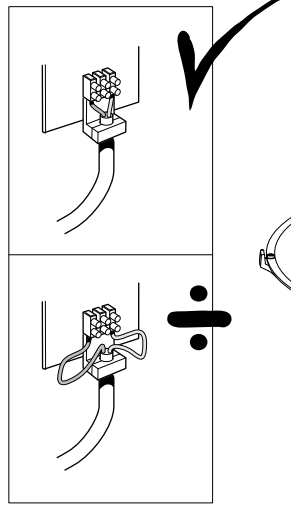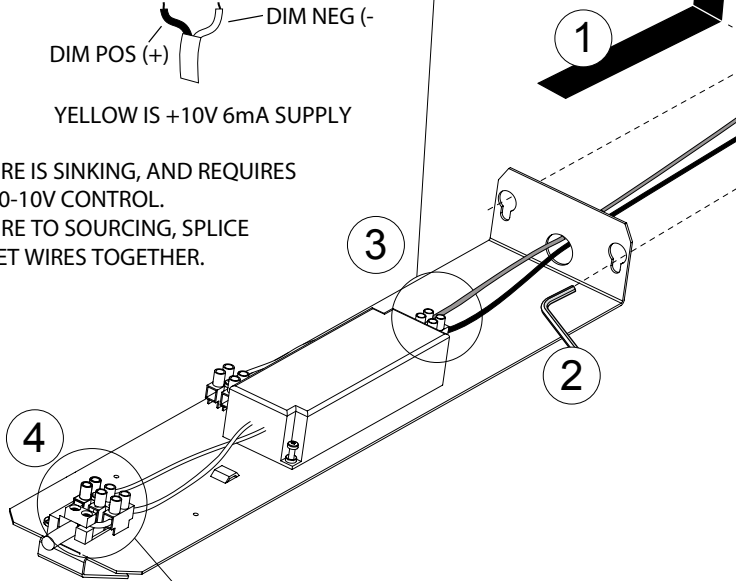

- Black to Black
- Green to Ground
- White to White

