



AJ GARDEN BOLLARD

This outdoor lamp emits a pleasant fully shaded downward directed, glare-free light. It is available in two different heights, and has a fixed head and the inside of the shade is painted white to ensure a soft, pleasant reflection of light. The shape of the shade provides superior lighting, allowing an optimal view of the surroundings. The garden bollard can be fitted with three different installation types namely a base plate, a spike or an anchor.



Arne Jacobsen

Arne Jacobsen was born and raised in Copenhagen. In 1927, he graduated as an architect from the Royal Danish Academy of Fine Arts in Copenhagen. After graduating, he obtained his first job at the office of the City Architect of Copenhagen launching his own office only two years later.

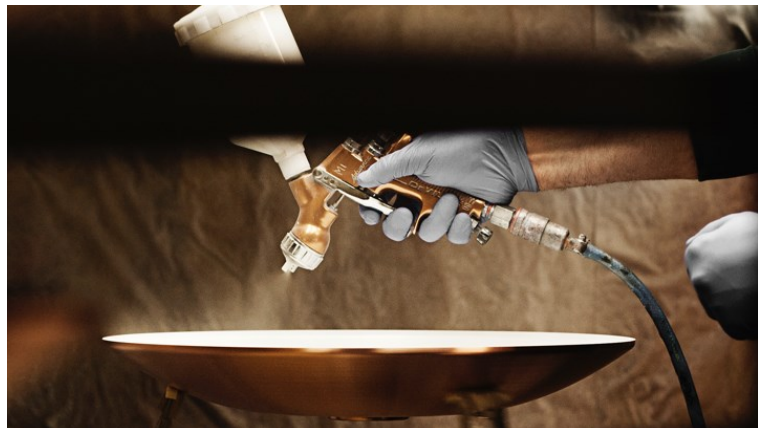

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Contains fixture, T-connector, and 5 m. cable with plugs. The adaptor must be bought separately. Requires installation by certified electrician. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

Mounting

AJ Garden is fitted with external adaptor, a maximum of 6 bollards (6,5 W) can be run by one adaptor. The adaptor must be bought separately. Maximum distance to last bollard is 30 m. Length of enclosed cables: 5 m. Stem: Ø12 mm. Spike mounting: Put the bollard with the spike into the ground and let the cable run over the ground. The bollard is connected to the adaptor with the enclosed cable and T-connector. Plug-and-Play. Anchor mounting: Anchor unit to be fixed in concrete. Use installation tubes for inground installation, with enclosed cables running inside, for legal fixed installation. Requires installation by certified electrician. Baseplate mounting 1: Mounting on a surface with overground installation. Enclosed cables running over the ground. When using T-connector for multiple bollards the connector must be easily accessible. The cables must be fixed for legal fixed installation. Requires installation by certified electrician. Baseplate mounting 2: Mounting on a surface with in-ground installation. Use installation tubes for in-ground installation, with enclosed cables running inside, for legal fixed installation. Requires installation by certified electrician.

Finish

Outside: Black, textured surface, powder coated. Inside: White, wet paint.

Materials

Head: Cast aluminium. Stem and base plate: Stainless steel. Spike: Cast aluminium with ABS housing. Anchor: Steel. Diffuser: Injection molded opal PC.

Sizes and weights

width x Height x Length (mm) | 90 x 504 x 90 Max 5.2 kg | 90 x 954 x 90 Max 6.8 kg

Class

Ingress protection: IP 65. Electric shock protection III. IK06

Light source


LED 2700K 6.5W

Lumen: 454

Information

Contains fixture, T-connector, and 5 m. cable with plugs. The adaptor must be bought separately. Requires installation by certified electrician.

This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

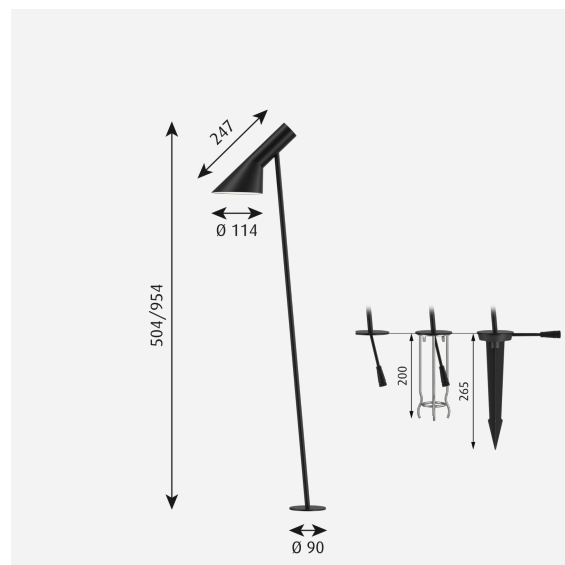


Related products



Skot Wall Lamp




AJ 50 Outdoor Wall Lamp



Bysted Bollard



Albertslund Outdoor Wall Lamp




Nyhavn Outdoor Wall Lamp



PH 4½-3 Outdoor Wall Lamp



Skot Bollard




Toldbod 155 Bollard




Toldbod 155 Outdoor Wall Lamp




Flindt Bollard




Flindt Wall Lamp




AJ Eklipsta Outdoor Wall Lamp




Flindt Garden Bollard



Bysted Garden Bollard



PH 3-2½ Bollard




PH 3-2½ Outdoor Wall Lamp



Toldbod 220 Outdoor Wall Lamp



Toldbod 290 Post Lamp



Toldbod 290 Outdoor Wall Lamp

Product variants

Dimension	Mounting	Light source
LONG	Anchor wo/adaptor	LED 2700K 6.5W
SHORT	Base wo/adaptor	LED 3000K 6.5W
	Spike w/o adap w/connector	

Design

Arne Jacobsen

Weight

Min: 1.2 kg Max: 6.79 kg

Dimensions


LONG, SHORT

Finish


Black texture

Light distribution diagrams


Cartesian

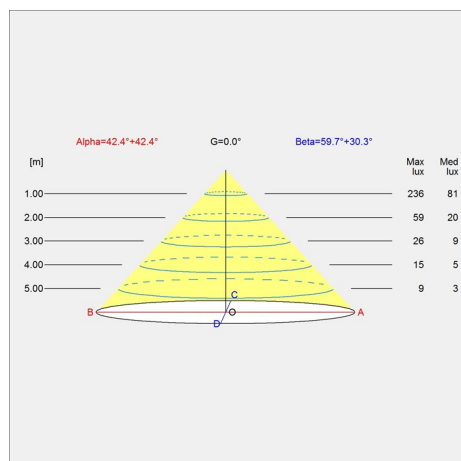

Isolux

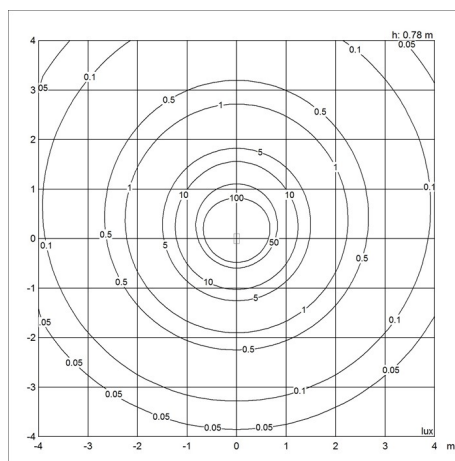

Polar

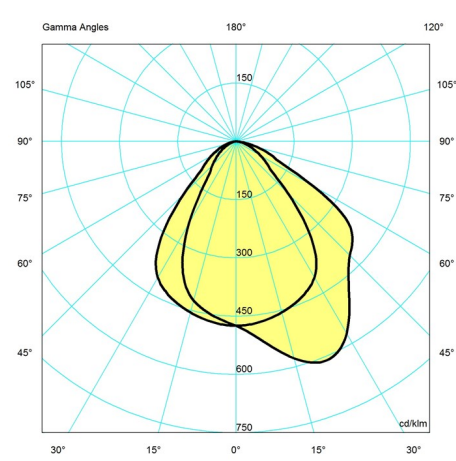

Spare parts & accessories

AJ Garden Bollard

Product	Variant number
T-Connector for Spike-Mount Garden Bollards	5747405303
Garden adapterbox cable 3x1	5747407039
AJ GARDEN SPARE BASE SCREWS (4 PCS)	5747406218