

# KEGLEN TABLE LAMP

Keglen Table Lamp - 5744167725

The table lamp's distinctive conical shade has a built-in curved diffuser. This ensures an attractive and glare-free downwardly directed light. The stem morphs into the diffuser shade, folding inward and creating a beautiful organic geometry. A gentle light is also emitted upward through a discreet uniform opening in the top of the shade to create a perfect ambiance.



## Jakob Lange - BIG Ideas

BIG Ideas, BIG's technology-driven specialist product division, is managed by architect Jakob Lange and produces the practice's lamps and other types of digital projects that underpin BIG's designs, buildings and ideas.



## Product info

### Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

### Information

With programming by the customer, there is a possibility to disable the switch. An integrated memory function ensures that the lamp will return to its latest adjusted lumen output when power has been removed and restored. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

### Mounting

Cord type: Plastic. Cord length: 2.3 m. Switch: On the base. Stepless dimming. Adapter: External with plug. Table lamp available with base or pin Ø40. Table thickness Ø40. Pin: 5-46 mm. Possibility to disable the on/off switch.

### Finish

<p>White or Black, matte wet painted.</p>

### Materials

Shade: Spun aluminum. Diffusor: Injection-molded PC. Base: Die cast aluminum. Stern: Machined aluminum.

### Sizes and weights

width x Height x Length (mm) | 175 x 440 x 175 Max 1.5 kg

### Class

Ingress protection IP20. Class II.

### Light source


LED 2700-2000K D2W 8.5W  
Lumen: 513

### Information


With programming by the customer, there is a possibility to disable the switch. An integrated memory function ensures that the lamp will return to its latest adjusted lumen output when power has been removed and restored. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.



## Related products



VL 38 Table Lamp



Above Pendant




Yuh Table Lamp



LP Slim Round Suspended




Silverback Suspended



LP Grand Suspended

## Keglen Table Lamp



LP Grand Surface Mounted



NJP Floor Lamp




LP Circle Suspended



AJ Munkegaard Ceiling Lamp



PH 2/1 Table Lamp




Silverback Ceiling/Wall Lamp



Keglen Pendant



AJ Mini Table Lamp



VL Studio Table/Floor Lamp



NJP Mini Table Lamp



Keglen Wall Lamp



AJ Oxford Table Lamp




PH 2/1 Pale Rose Brass Table Lamp



PH 2/1 Portable Lamp



PH 2/1 Aged Brass Table Lamp





Panthella 160 Portable Lamp



Tomoshi Portable Lamp




VL 45 Radiohus Portable Lamp


**Keglen Table Lamp****Panthella 250 Portable Lamp****PH 2/2 Luna Aged Brass Opal  
Table Lamp****Rumee 220 Portable Lamp****VL Ring Crown Table Lamp**

# Light distribution diagrams


## Cartesian

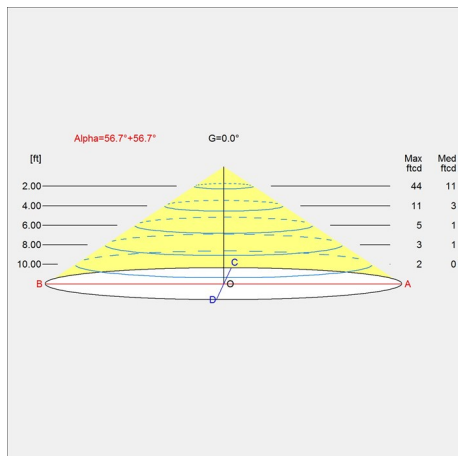

## Isolux

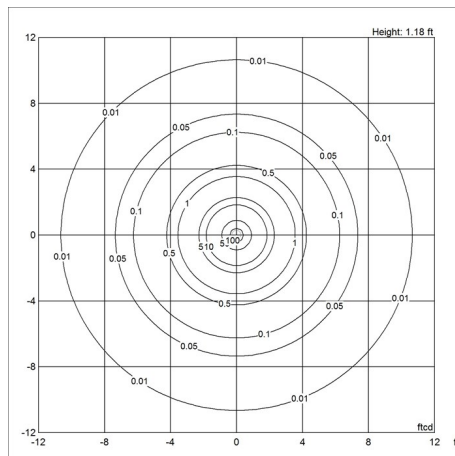

## Polar

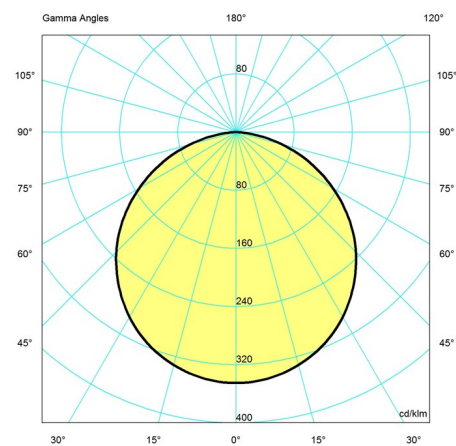

## Spare parts & accessories

Product	Variant number
Adaptor 12V black	5744164867
Adaptor 12V white	5744164870

## Data specifications

Colour	White	Length	175
Width	175	Height	440
Built-in Height	-	IP class	-
Class	II	Net Weight	0.7
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	LED 2700-2000K D2W 8.5W
Kelvin	2700	CRI	90
SDCM	3	Lumen	513

**Keglen Table Lamp**

Watt	8.5
Light control	-
UGR Transversal / Axial	23.1/23.1
Driver life	-

Efficacy	60
Min. Dim Level (%)	-
L80B50 (hours)	-