


## PH 5 MINI

Designed by Poul Henningsen

---

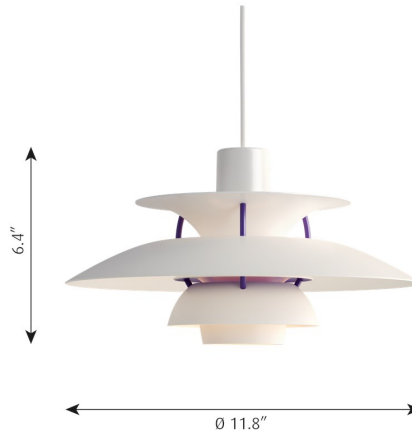

---

### Description

The fixture provides 100% glare-free light. Its design is based on the principle of a reflective three-shade system that directs most of the light downward. The fixture emits both downward and lateral light, thus illuminating itself.

---

### Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
10000142110	WHITE CLASSIC, 336	11.8 / 6.4 / 11.8 IN / 2.0 LB
10000142113	WHITE MODERN, 337	11.8 / 6.4 / 11.8 IN / 2.0 LB
10000142115	HUES OF GREEN, 331	11.8 / 6.4 / 11.8 IN / 2.0 LB
10000142116	HUES OF GREY, 333	11.8 / 6.4 / 11.8 IN / 2.0 LB
10000142117	HUES OF ORANGE, 328	11.8 / 6.4 / 11.8 IN / 2.0 LB
10000142118	HUES OF RED, 330	11.8 / 6.4 / 11.8 IN / 2.0 LB
10000142119	HUES OF ROSE, 329	11.8 / 6.4 / 11.8 IN / 2.0 LB
5741917457	HUES OF BLUE, 332	11.8 / 6.4 / 11.8 IN / 2.7 LB
5741918223	COP LAC, 930	11.8 / 6.4 / 11.8 IN / 5.0 LB
5741919251	BRASS, 936	11.8 / 6.4 / 11.8 IN / 3.9 LB
5741934359	MONOCHROME BLUE	11.8 / 6.4 / 11.8 IN / 2.7 LB
5741934456	MONOCHROME WHITE	11.8 / 6.4 / 11.8 IN / 2.7 LB
5741934906	MONOCHROME BLACK	11.8 / 6.4 / 11.8 IN / 2.7 LB

---

# louis poulsen

## Materials & Finishes

### **MATERIALS**

Shades and anti-glare disc: Spun aluminum, spun copper or spun brass. Struts: rolled aluminum.

### **FINISHES**

Matt powder coated or Matt wet painted.

Powder coated: White Classic, White Modern and Metal finishes.

Wet painted: Monochromes, Pastels and Hues Of finishes.

Please note that the copper and brass surface is untreated. This means that the surface will change over time and develop a patina.

---

## Mounting

Canopy and cord: Black for Monochrome Black, White for all other colors. Cord type: 3-conductor, 18 AWG cloth-covered power cord. Cord length: 12 feet. For mounting instructions, see download section on the product detail page.

---

## Information

Electrical:

System Wattage: 6W

LED Wattage: 6 W

Delivered lumens: 156 - 142

Efficacy: 26.0 lm/W - 23.7 lm/W

Certifications:

cULus, Damp Location

Protection class IP20


Controllability: Phase dimming

Actual performance dependent upon screw-base lamp used. For the E-socket product variants, bulbs are not included. LED light source is part of the product.


---

## Light distribution diagrams


### CARTESIAN

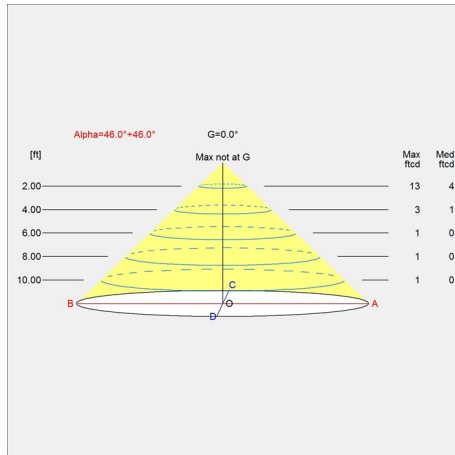

### ISOLUX

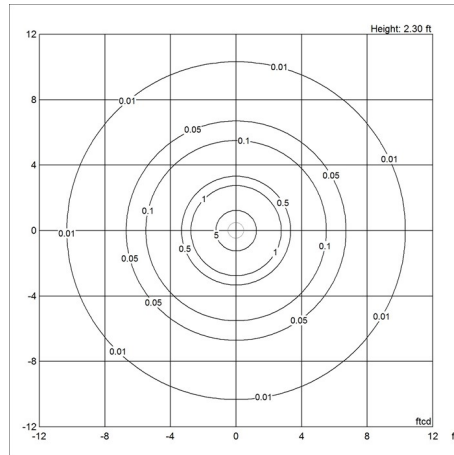

### POLAR

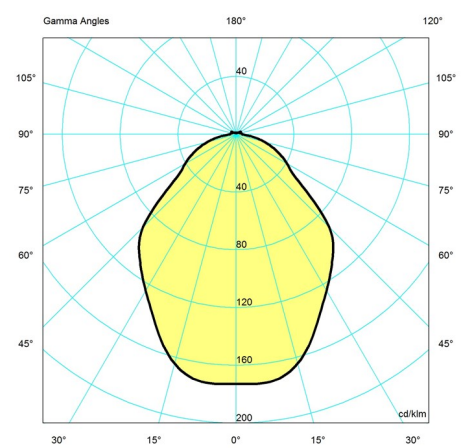

## Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
10000142110	1x10W A-15/medium	120V	117	-	White fabric cord
10000142113	1x10W A-15/medium	120V	156	-	White fabric cord
10000142115	1x10W A-15/medium	120V	142	-	White fabric cord
10000142116	1x10W A-15/medium	120V	142	-	White fabric cord
10000142117	1x10W A-15/medium	120V	147	-	White fabric cord
10000142118	1x10W A-15/medium	120V	147	-	White fabric cord
10000142119	1x10W A-15/medium	120V	147	-	White fabric cord
5741917457	1x10W A-15/medium	120V	142	-	White fabric cord
5741918223	1x10W A-15/medium	120V	117	-	White fabric cord
5741919251	1x10W A-15/medium	120V	117	-	White fabric cord
5741934359	1x10W A-15/medium	120V	259	-	White fabric cord
5741934456	1x10W A-15/medium	120V	334	-	White fabric cord
5741934906	1x10W A-15/medium	120V	258	-	Black fabric cord