

PH LOUVRE



, , Designed by Poul Henningsen

Type:

Product:

Project:

Modified:

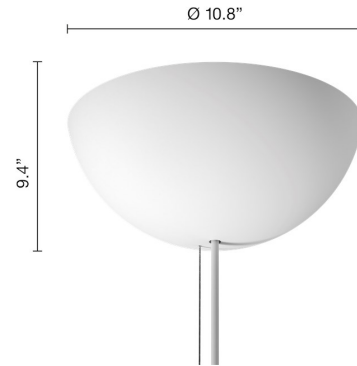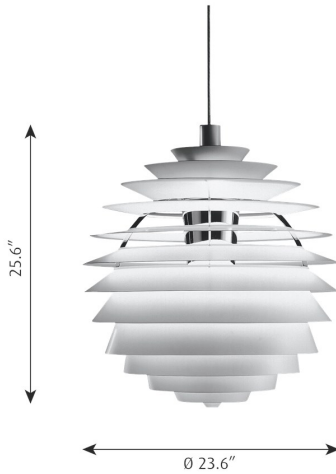

Technical specifications

Materials

Shades: Spun aluminum. Frame: High lustre chrome plated, extruded brass. Housing: High lustre chrome plated, spun aluminum.

Finishes

White, wet painted.

Mounting

Suspension type: 1x stainless steel aircraft cable. Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'. For mounting instructions, see download section on the product detail page.

Information

Electrical:

System Wattage: 97W

LED Wattage: 89 W

Delivered lumens: 2,479 - 2,596

Efficacy: 25.6 lm/W - 26.8 lm/W

Certifications:

cULus, Dry Location

Protection class IP20

Controllability: 0-10V Dimming

Color Rendering: Ra≥90 For the E-socket product variants, bulbs are not included. LED light source is part of the product.

PH LOUVRE

, , Designed by Poul Henningsen

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	DELIVERED LUMEN	FEATURES	CABLE	COLOR, RAL	W / H / L (IN) / W (LB)
5741917910	Integrated LED 2700K (97 W, no bulb required)	120-277V/60HZ	2596	Dim 0-10v	White fabric cord and wire	WHT, 015	23.6 / 25.6 / 23.6 in / 22.0 lb
5741917923	Integrated LED 3000K (97 W, no bulb required)	120-277V/60HZ	2596	Dim 0-10v	White fabric cord and wire	WHT, 015	23.6 / 25.6 / 23.6 in / 22.0 lb
