

PH SNOWBALL


, , Designed by Poul Henningsen

Type:

Product:

Project:

Modified:

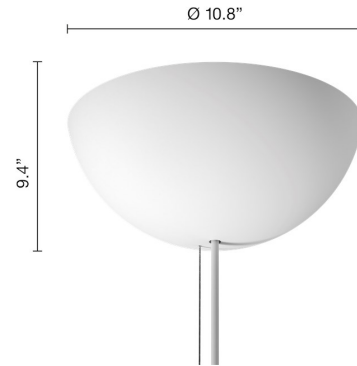

Technical specifications

Materials

Shades: Spun aluminium.

Frame: Brass metallised, die cast zinc or High lustre chrome plated, die cast aluminium.

Housing: Brass metallised, spun zinc or High lustre chrome plated, spun aluminium.

Finishes

Wet painted outside in White, Dusty Blue, Dusty Green or Soft White.

Wet painted inner side, white.

High lustre chrome plated or polished brass metallised frame.

Mounting

Canopy: White.

Cord length: 12'.

Cord type: 3-conductor, 18 AWG white PVC power cord. For mounting instructions, see download section on the product detail page.

Information

Electrical:

System Wattage: 22W - 44W

LED Wattage: 20 W - 42 W

Delivered lumens: 894 - 1,085 lm

Efficacy: 24.6 - 40.6 lm/W

Certifications:

cULus, Dry Location

Protection class IP20

Controllability: Phase dimming or 0-10V dimming.

Color Rendering: Ra≥90 for LED variants.

Performance dependent upon screw-base lamp used in socketed variants. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

SPECIFICATION NOTES

a. Socketed variant available in 1/22W/A-21/120V.

b. LED variants available with mains dimming at 120V or 0-10V dimming with 120-277V.

PH SNOWBALL

, , Designed by Poul Henningsen

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FREQ	DELIVERED LUMEN	FEATURES	CABLE	COLOR, RAL	W / H / L (IN) / W (LB)
10000149871	Integrated LED 3000K (44 W, no bulb required)	120-277V/60HZ	1085	Dim 0-10v	White fabric cord	WHT, 092	15.7 / 15.4 / 15.7 in / 9.8 lb
10000149872	Integrated LED 3000K (44 W, no bulb required)	120V/60HZ	1085	Phase dimming (mains dimm)	White fabric cord	WHT, 092	15.7 / 15.4 / 15.7 in / 9.8 lb
10000149873	Integrated LED 3000K-1800K dim-2-warm (44 W, no bulb required)	120-277V/60HZ	894	Dim 0-10v	White fabric cord	WHT, 092	15.7 / 15.4 / 15.7 in / 9.8 lb
10000149874	Integrated LED 3000K-1800K dim-2-warm (44 W, no bulb required)	120V/60HZ	894	Phase dimming (mains dimm)	White fabric cord	WHT, 092	15.7 / 15.4 / 15.7 in / 9.8 lb
5741928572	1 × A-21 bulb (medium base) (22 W max)	120V/60HZ	1235	-	White fabric cord	WHT, 092	15.7 / 15.4 / 15.7 in / 7.7 lb
5741945911	1 × A-21 bulb (medium base)	120V/60HZ	734	-	White fabric cord	Dusty green/brass metallised	15.7 / 15.4 / 15.7 in / 7.5 lb
5741945966	1 × A-21 bulb (medium base)	120V/60HZ	734	-	White fabric cord	Dusty green/high lustre chrome plated	15.7 / 15.4 / 15.7 in / 7.5 lb
5741946017	1 × A-21 bulb (medium base)	120V/60HZ	734	-	White fabric cord	Soft white/brass metallised	15.7 / 15.4 / 15.7 in / 7.5 lb
5741946062	1 × A-21 bulb (medium base)	120V/60HZ	734	-	White fabric cord	Soft white/high lustre chrome plated	15.7 / 15.4 / 15.7 in / 7.5 lb