

SILVERBACK CEILING/WALL LAMP


, , Designed by KiBiSi

Type:

Product:

Project:

Modified:

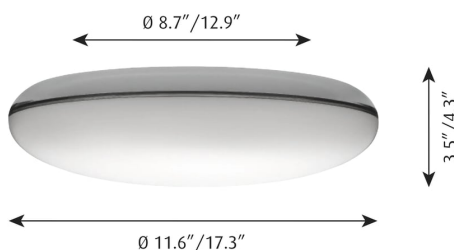

Technical specifications

Materials

Ø 11.6": Rear housing: Die cast aluminum powder coated white. Shade: Opalescent PMMA and semi-metalized PC. Ø 17.3": Rear housing: Die-stamped steel sheet, powder coated, white. Shade: Opalescent PMMA and semi-metalized PC.

Finishes

White opal and semi-metalized.

Mounting

Surface: mounted directly to finished surface over a recessed 4" octagonal junction box. For mounting instructions, see download section on the product detail page.

Information

Electrical:

System Wattage: 10W or 33W
LED Wattage: 9 W or 30 W
Delivered lumens: 863 - 2,117
Efficacy: 86.3 lm/W - 64.2 lm/W
Certifications: cULus, Damp Location
Protection class IP20
Controllability: 0-10V Dimming
Color Rendering: Ra≥90 For the E-socket product variants, bulbs are not included. LED light source is part of the product.

SPECIFICATION NOTES

- 11.6 IN size available only in 10W.
- 17.3 IN size available only in 33W.

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	DELIVERED LUMEN	FEATURES	CABLE	COLOR, RAL	W / H / L (IN) / W (LB)
5743912515	Integrated LED 3000K (33 W, no bulb required)	120-277V/60HZ	2401	Dim 0-10v	-	OPAL, 898	17.3 / 4.3 / 17.3 in / 5.3 lb
5743912528	Integrated LED 3000K (10 W, no bulb required)	120-277V/60HZ	863	Dim 0-10v	-	OPAL, 898	11.6 / 3.5 / 11.6 in /

SILVERBACK CEILING/WALL LAMP

, , Designed by KiBiSi

required)

3.6 lb
