

TOLDBOD PENDANT

Toldbod Pendant - 5741101412

The pendant emits soft downwards directed light. The matt, white-painted inside of the elliptical shade helps to assure even distribution of the light.



**Original Coffee,
Copenhagen**



Dalum Papirfabrik

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Mounting

Suspension type: Cable 2x0,75 mm². Ø400: Cable and wire. Cable length: 3 m. (Ø120/Ø170), 4 m. (Ø250/Ø400). Canopy: Yes. Black and white cords.

Finish

<p>Black, White, Light Grey or Blue-Grey, matte powder coated.</p>

Materials

Shade: Spun aluminium. Ø120 reflector: Spun white matt coated aluminium. Ø400 diffuser: Matt acrylic

Sizes and weights

width x Height x Length (mm) | 120 x 121 x 120 Max 1.5 kg | 170 x 173 x 170 Max 2.1 kg | 250 x 254 x 250 Max 3.1 kg

Class


Ingress protection IP20. Electric shock protection II w/o ground.

Light source

1xG9



Related products



PH 3/2 Pendant



Doo-Wop Pendant



Moser Pendant




Wohlert Pendant



Toldbod Glass Pendant



PH 3½-3 Metal Pendant



PH 2/1 Pendant



PH 5 Mini




VL Ring Crown 1 Pendant




VL 45 Radiohus Pendant

PH 3½-3 Pale Rose Brass
Pendant

PH 3/3 Pendant




VL 56 Pendant

VL 45 Radiohus Pale Rose
PendantPH 3/3 Aged Brass Opal
Pendant


FJ Elements Pendant

Light distribution diagrams


Cartesian

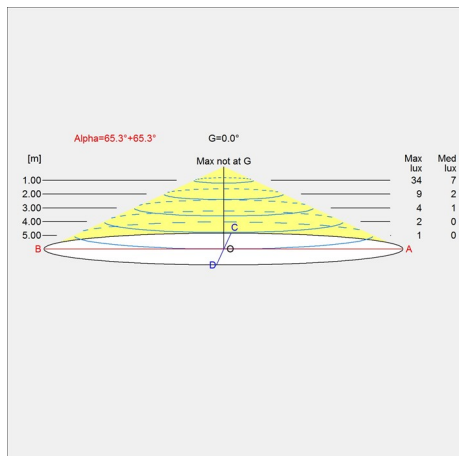

Isolux

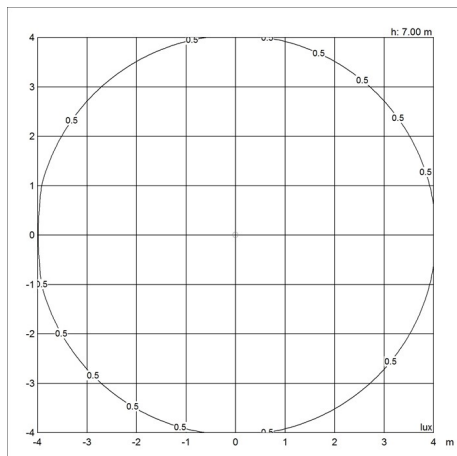

Polar

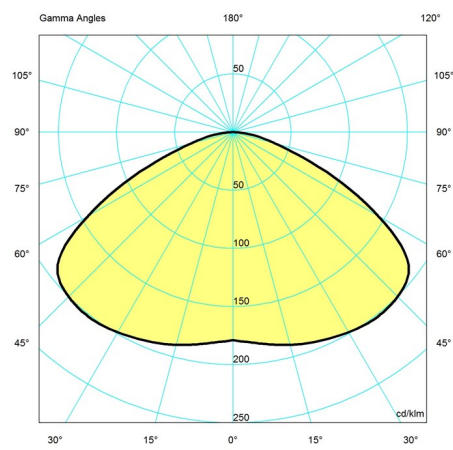

Spare parts & accessories

Product

Canopy White 2-part tophat ®
Canopy Black 2-part tophat®

Variant number

5749329034
5749329021

Data specifications

Colour	White	Length	120
Width	120	Height	121
Built-in Height	-	IP class	20
Class	II	Net Weight	1.5
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	1xG9
Kelvin	-	CRI	-
SDCM	-	Lumen	144

Toldbod Pendant

Watt	2.0
Light control	-
UGR Transversal / Axial	21.3/21.3
Driver life	-

Efficacy	72
Min. Dim Level (%)	-
L80B50 (hours)	-