


# WOHLERT PENDANT

, , Designed by Vilhelm Wohlert

Type:	<input type="text"/>
Product:	<input type="text"/>
Project:	<input type="text"/>
Modified:	<input type="text"/>

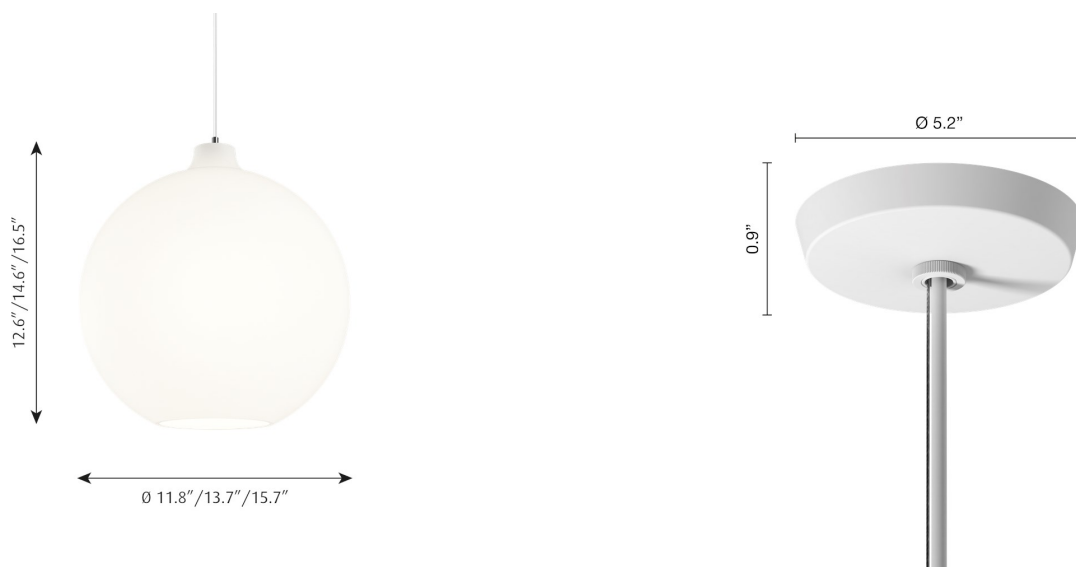

## Technical specifications

### Materials

Shade: Hand blown white opal glass. Pendant stem: Brushed steel.

### Finishes

Opal glas, matte white.

### Mounting

Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'. For mounting instructions, see download section on the product detail page.

### Information

#### Electrical:

System Wattage: 22W - 44W

LED Wattage: 20 W - 42 W

Delivered lumens: 894 - 1,085 lm

Efficacy: 24.6 - 40.6 lm/W

#### Certifications:

cULus, Dry Location

Protection class IP20

Controllability: Phase dimming or 0-10V dimming.

Color Rendering: Ra≥90 for LED variants.

Performance dependent upon screw-base lamp used in socketed variants. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

### SPECIFICATION NOTES

a. 11.8 IN available only in 22W/A-21/medium.

b. 13.7 IN available only in 22W/A-21/medium.

c. 15.7 IN available in 22W/A-21/medium or 44W LED.

d. Incandescent variants available only in 120V.

e. LED variants available with mains dimming at 120V or 0-10V dimming with 120-277V.

# WOHLERT PENDANT

, , Designed by Vilhelm Wohlert

## Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FREQ	DELIVERED LUMEN	FEATURES	CABLE	COLOR, RAL	W / H / L (IN) / W (LB)
10000124355	1 × A-21 bulb (medium base) (22 W max)	120V/60HZ	951	-	White cord	GLASS, 960	11.8 / 12.6 / 11.8 in / 6.4 lb
10000124356	1 × A-21 bulb (medium base) (22 W max)	120V/60HZ	951	-	White cord	GLASS, 960	13.7 / 14.6 / 13.7 in / 7.8 lb
10000124357	1 × A-21 bulb (medium base) (22 W max)	120V/60HZ	951	-	White cord	GLASS, 960	15.7 / 16.5 / 15.7 in / 10.4 lb
10000149844	Integrated LED 3000K (44 W, no bulb required)	120-277V/60HZ	3587	Dim 0-10v	White fabric cord	GLASS, 960	13.7 / 14.6 / 13.7 in / 5.4 lb
10000149845	Integrated LED 3000K (44 W, no bulb required)	120-277V/60HZ	3617	Dim 0-10v	White fabric cord	GLASS, 960	15.7 / 16.5 / 15.7 in / 10.4 lb
10000149846	Integrated LED 3000K (44 W, no bulb required)	120V/60HZ	3587	Phase dimming (mains dimm)	White fabric cord	GLASS, 960	13.7 / 14.6 / 13.7 in / 5.4 lb
10000149847	Integrated LED 3000K (44 W, no bulb required)	120V/60HZ	3617	Phase dimming (mains dimm)	White fabric cord	GLASS, 960	15.7 / 16.5 / 15.7 in / 10.4 lb
10000149848	Integrated LED 3000K-1800K dim-2-warm (44 W, no bulb required)	120-277V/60HZ	3955	Dim 0-10v	White fabric cord	GLASS, 960	13.7 / 14.6 / 13.7 in / 5.4 lb
10000149849	Integrated LED 3000K-1800K dim-2-warm (44 W, no bulb required)	120-277V/60HZ	2981	Dim 0-10v	White fabric cord	GLASS, 960	15.7 / 16.5 / 15.7 in / 10.4 lb
10000149850	Integrated LED 3000K-1800K dim-2-warm (44 W, no bulb required)	120V/60HZ	3955	Phase dimming (mains dimm)	White fabric cord	GLASS, 960	13.7 / 14.6 / 13.7 in / 5.4 lb
10000149851	Integrated LED 3000K-1800K dim-2-warm (44 W, no bulb required)	120V/60HZ	2981	Phase dimming (mains dimm)	White fabric cord	GLASS, 960	15.7 / 16.5 / 15.7 in / 10.4 lb