WOHLERT PENDANT

The fixture provides uniform, general and diffused illumination. The opening at the bottom of the glass produces downwards directed light. The quality of the glass ensures that the fixture is evenly lit.





Vilhelm Wohlert

Vilhelm Wohlert (1920-2007) graduated as an architect from The Royal Danish Academy of Fine Arts in Copenhagen in 1944. During his career, he held the position of professor at The Royal Danish Academy of Fine Arts in Copenhagen from 1968 until 1986, was an Honorary Member of the same institution, where he was also Deputy CEO in the period 1968–71.





Wohlert Pendant

Product info

Mounting

Suspension type E27: Cable 3x0,75mm². Canopy: Yes. Cable length: 3m. Suspension type LED: Cable 2x1,5mm². Canopy: Yes. LED canopy contains driver. Cable length: 4m.

Finish

Opal glas, matte white.

Materials

Shade: Mouth-blown matt white opal glass. Pendant tube: Brushed steel.

Sizes and weights

width x Height x Length (mm) | $350 \times 370 \times 350$ Max 10.6 kg | $300 \times 320 \times 300$ Max 2.5 kg | $400 \times 420 \times 400$ Max 10.6 kg

Class

Ingress protection IP20. Electric shock protection I w. ground.

Light source

1x70W E27



louis poulsen louispoulsen.com

Wohlert Pendant

Related products







PH 5 Mini

PH 2/1 Pendant

PH 3/2 Pendant







Doo-Wop Pendant

Moser Pendant

Toldbod Pendant

Product variants







Lumen Lighting control 2955 Dali

Phase dimming (mains dimm) Wireless bluetooth

2981

3617

Toldbod Glass Pendant

PH 31/2-3 Metal Pendant

VL Ring Crown 1 Pendant



VL 45 Radiohus Pendant

PH 3½-3 Pale Rose Brass Pendant

PH 3/3 Pendant







PH 3/3 Pale Rose Pendant



PH 3/3 Aged Brass Opal Pendant

FJ Elements Pendant

louis poulsen louispoulsen.com

Product description

Suspended glass luminaire lconic design Family of three dimensions

Mounting

Can be mounted on 4" octagonal junction box. (USA only)

Light description

360° distribution

Design

Vilhelm Wohlert

Material

Shade: matte opal, mouth-blown glass.

Stem: brushed aluminum

Socket (incandescent): Porcelain, medium base, for A-23 frosted envelope lamps.

Socket (compact fluorescent): Polycarbonate, GX24q-3/4 base, for 4-pin compact fluorescent lamps.

Canopy (incandescent): 5. 3" diameter x 0. 9" tall cone of spun aluminum. Canopy (fluorescent): 6. 6" diameter x 2. 7" tall cone of spun aluminum.

Cable: white PVC coated, 12 ft. (USA)

For compact fluorescent variant: electronic ballast for 120-277V operation housed inside canopy. (USA only)

Weight

Min: 10.419 kg Max: 4.5 kg

Dimensions


Ø 300, Ø 350, Ø 400

Finish

White opal glass

louis poulsen.com

Light distribution diagrams

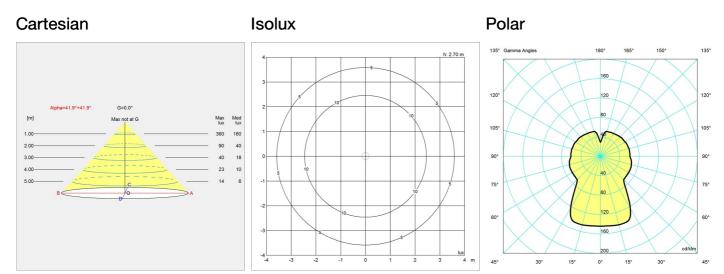

Spare parts & accessories

Product	Variant number
Canopy White 2-part tophat ®	5749329034
Wohlert Ø300 glass	5741480382
Wohlert Ø350 glass	5741480395
Wohlert Ø400 glass	5741480405

louis poulsen louispoulsen.com