

AJ EKLIPTA WALL LAMP

Designed by Arne Jacobsen

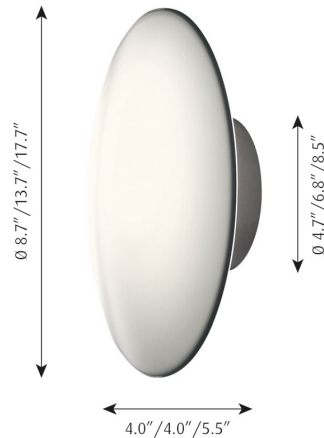

Technical specifications

Materials

Ceiling/Wall box: Spun aluminum. Diffuser: Hand blown white opal glass.

Finishes

White, powder coated. White opal glass.

Mounting

Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box (13.7"/17.7") or 3" octagonal junction box (8.7"). For mounting instructions, see download section on the product detail page.

Information

Electrical:

LED System Wattage: 10W or 24W

LED Wattage: 9W or 22W

Delivered lumens: 371 - 1,937

Efficacy: 37.1 lm/W - 80.7 lm/W

Certifications: cULus, Wet Location (Incandescent variants), Damp location (LED variants)

Protection class IP20

Controllability: 0-10V Dimming, Phase Dimming

Color Rendering: Ra≥90 For the E-socket product variants, bulbs are not included. LED light source is part of the product.

SPECIFICATION NOTES


- 8.7" variant available in 40W or 10W LED.
 - 13.7" variant available in 60W or 10W LED.
 - 17.7" variant available in 100W or 24W LED.
 - 120-277V only available in 10W LED with 13.7" or 24W LED with 17.7".
 - DIM 0-10V only available with LED light source.
-

AJ EKLIPTA WALL LAMP


Designed by Arne Jacobsen

Light distribution diagrams


CARTESIAN

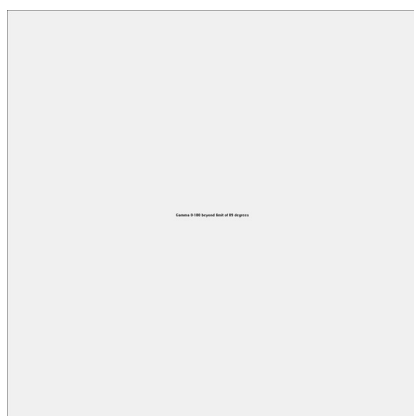

ISOLUX

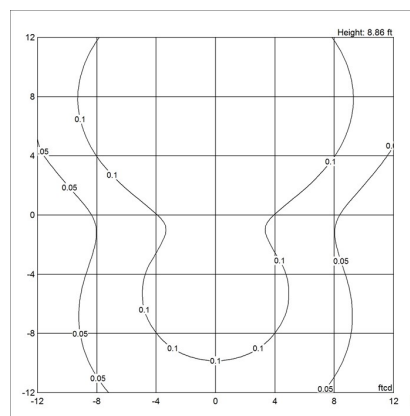

POLAR

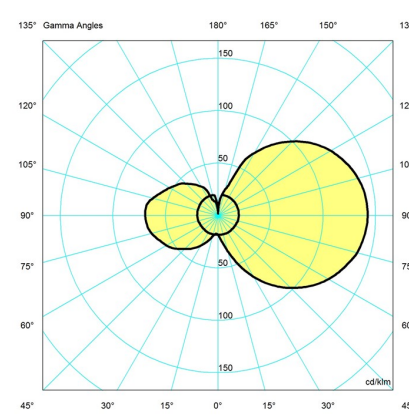

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
10000121108	LED 3000K 10W	120-277V/60HZ	705	Dim 0-10v	-
10000121113	LED 3000K 25W	120-277V/60HZ	1628	Dim 0-10v	-
5743908011	1x40W G9	120V	312	-	-
5743911192	LED 3000K 10W		371	-	-
5842905400	1x60W A-19/IF Medium US	120V	396	-	-
5842905426	1x100W A-19/IF medium US	120V	502	-	-

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
10000121108	WHT, 062	13.8 / 3.9 / 13.8 IN / 6.0 LB
10000121113	WHT, 062	17.7 / 5.5 / 17.7 IN / 9.0 LB
5743908011	WHT, 062	8.7 / 4.1 / 8.7 IN / 1.3 LB
5743911192	WHT, 062	8.7 / 4.1 / 8.7 IN / 1.8 LB
5842905400	WHT, 062	13.8 / 3.9 / 13.8 IN / 6.0 LB
5842905426	WHT, 062	17.7 / 5.5 / 17.7 IN / 9.0 LB