

# CIRQUE

**Project name:**

**Project type:**

**Notes:**



## Design

Clara von Zweigbergk

## Product description

Cirque is inspired by the spinning amusement park rides of Tivoli in Copenhagen. The fixture emits soft comfortable downlight. The matte, white-painted inside help assure even distribution of the light. The opening in the top of the fixture provides decorative illumination of the cable above and ensures that the fixture retains the full expression of its visual shape both when illuminated and when switched off. Available in 3 sizes (5.9", 8.7" 15.0"), and 4 unique combinations of colors or grey tones—colors are identified by the upper most color which are either grey, copper, red or yellow—see online images for full color combinations.







## Variant options

**Dimension**

15 IN
5.9 IN
8.7 IN

**Color**

 Copper top
 Grey top
 Red top
 Yellow top

**Light source**

A-15/medium
A-19/medium
A-21/medium

**Voltage frequency**

120V
------

## Specification notes

a. 5.9 IN size available only in 10W/A-15/medium. b. 8.7 IN size available only in 15W/A-19/medium. c. 15 IN size available only in 22W/A-21/medium. d. All variants come with white cord and canopy.

## Light description

A diffuse, downward light is reflected from the matte, white interior of the shade, which is glare-free when hung at normal height. Cirque pendant is provided with a medium base socket allowing the user to choose the color temperature, and/or wirelessly-controlled lamp.

## Mounting

Mounts onto a 4 inch octagonal outlet box. Canopy: White flat cone profile, 5.3 IN diameter x 1 IN tall. Cord type: 3-conductor, 18 AWG white fabric-covered power cord. Cord length: 12 feet.

## Information

Electrical:  
 System Wattage: 10W or 22W  
 LED Wattage: 9 W or 20 W  
 Delivered lumens: 356 - 832  
 Efficacy: 35,6 lm/W - 37,8 lm/W  
 Certifications:  
 cULus, Dry Location  
 Protection class IP20  
 Controllability: Phase dimming  
 Actual performance dependent upon screw-base lamp used.

## Other functions

Longer cord lengths. Alternative finishes.


## Specification notes

- a. 5.9 IN size available only in 10W/A-15/medium.
- b. 8.7 IN size available only in 15W/A-19/medium.
- c. 15 IN size available only in 22W/A-21/medium.


## Light distribution diagrams

For the full data set on all variants, see [louispoulsen.com](http://louispoulsen.com).


Cartesian

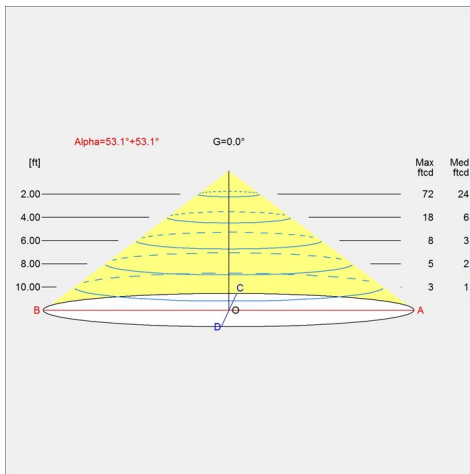



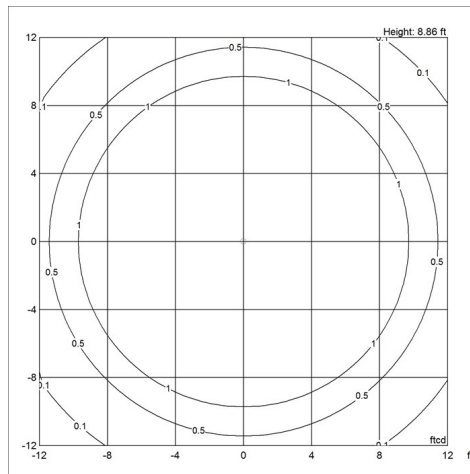



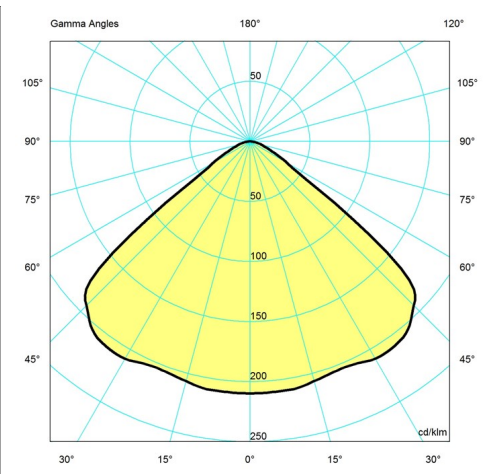





Isolux



Polar



## Variant options

Dimension	Color	Light source	Voltage frequency	Variant number
8.7 IN	 Grey top	A-19/medium	120V	5741919905
15 IN	 Copper top	A-21/medium	120V	5741919772
15 IN	 Red top	A-21/medium	120V	5741919785
15 IN	 Yellow top	A-21/medium	120V	5741919798
8.7 IN	 Copper top	A-19/medium	120V	5741919808
8.7 IN	 Red top	A-19/medium	120V	5741919811
8.7 IN	 Yellow top	A-19/medium	120V	5741919824
5.9 IN	 Copper top	A-15/medium	120V	5741919837
5.9 IN	 Red top	A-15/medium	120V	5741919840
5.9 IN	 Yellow top	A-15/medium	120V	5741919853
15 IN	 Grey top	A-21/medium	120V	5741919895
5.9 IN	 Grey top	A-15/medium	120V	5741919918