

MOSER

Project name:

Project type:

Notes:



Design

Anu Moser

Product description

Moser pendant draws inspiration from the drop of hot glass when taken from the furnace. It is an opal white glass pendant with near-spherical shape. With its closed bottom, light is diffused over its 360° distribution. The glass shade is supported by three large hooks of polished aluminum that enter holes in the top of the glass shade that are protected with black rubber grommets. Available in three sizes.



Variant options

Dimension

7.3 IN
8.1 IN
9.8 IN

Light source

A-19/medium

Voltage frequency

120V

Specification notes

a. Comes with white cord and canopy.

Light description

Light distribution is spherical and 100% glare-free. Direct view of the light source is prevented to eliminate glare.

Mounting

Mounts onto a 4 inch octagonal outlet box. Canopy: White, flat cone profile, 5.3 IN diameter x 1 IN tall. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12 feet.

Information

Electrical:
 System Wattage: 15W
 LED Wattage: 14 W
 Delivered lumens: 664
 Efficacy: 44.3 lm/W
 Certifications:
 cULus, Dry Location
 Protection class IP20
 Controllability: Phase dimming
 Actual performance dependent upon screw-base lamp used.

Other functions

Longer cord lengths.


Specification notes

- a. Incandescent and LED light sources only available in 120V.
- b. 15W LED light source only available in 7.3" or 8.1" dimension.
- c. 22W LED light source only available in 9.8" dimension.
- d. 22W LED light source only available in 9.8" dimension.


Light distribution diagrams

For the full data set on all variants, see louispoulsen.com.


Cartesian

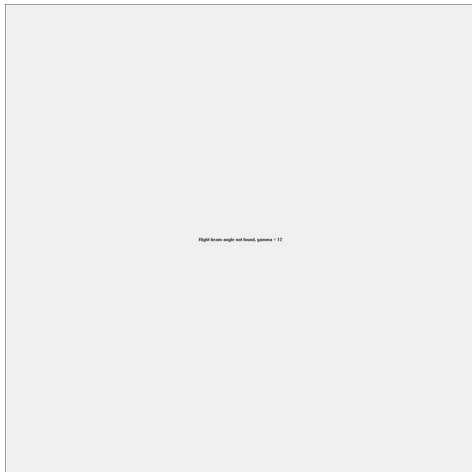

Isolux

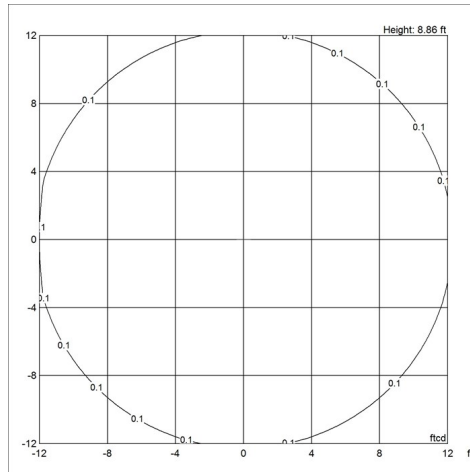

Polar

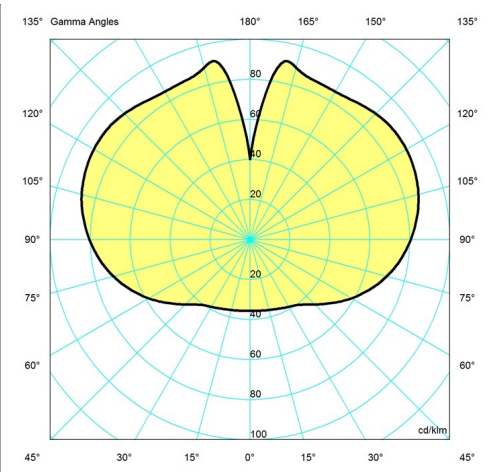

Material

Glass shade is matte, opal white, handblown glass 0. 2 IN thick. Canopy is spun aluminum, 0. 03 IN thick. Socket: Porcelain, medium base for A-19 size lamps.
 Matte opal glass

Weight

Min: 2.829 lbs Max: 4.228 lbs

Dimensions

7.3 IN, 8.1 IN, 9.8 IN

Finish

Matte white opal glass

Voltage

120V

Variant options

| Dimension | Light source | Voltage frequency | Variant number |
|-----------|--------------|-------------------|----------------|
| 8.1 IN | A-19/medium | 120V | 5741913037 |
| 7.3 IN | A-19/medium | 120V | 5741913024 |
| 9.8 IN | A-19/medium | 120V | 5741913040 |