

PH 2/1 STEM FITTING

Designed by Poul Henningsen

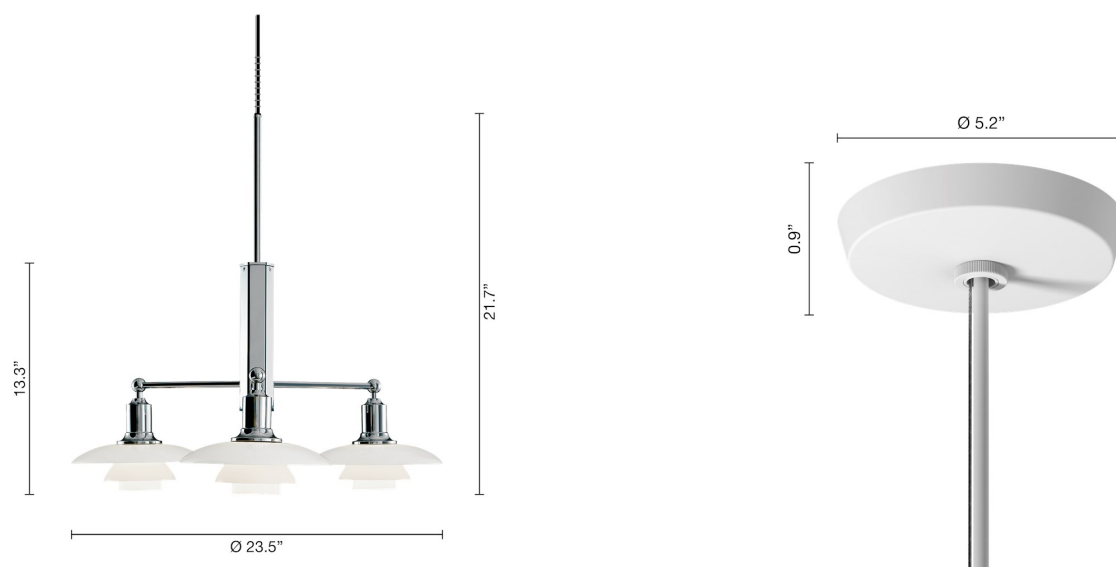

Technical specifications

Materials

Shades: Handblown white opal glass.

Body: High lustre chrome plated, brass.

Socket cover: High lustre chrome plated, spun aluminum.

Finishes

High lustre chrome plated. White opal glass.

Mounting

Canopy: White.

Cord length: 12'.

Cord type: 3-conductor, 18 AWG black braided fabric covered power cord. For mounting instructions, see download section on the product detail page.

Information

Electrical:

System Wattage: 30W

Delivered lumens: 1,025

Efficacy: 34 lm/W

Certifications:

cULus, Dry Location

Protection class IP20

Controllability: Phase dimming


Actual performance dependent upon screw-base lamp used. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

PH 2/1 STEM FITTING


Designed by Poul Henningsen

Light distribution diagrams


CARTESIAN

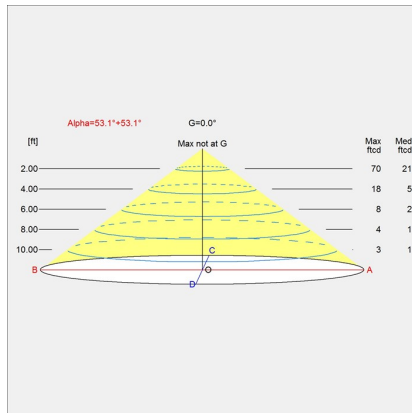

ISOLUX

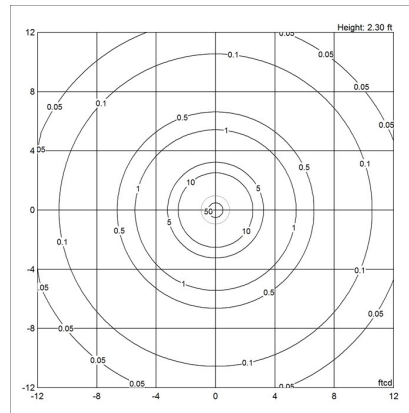

POLAR

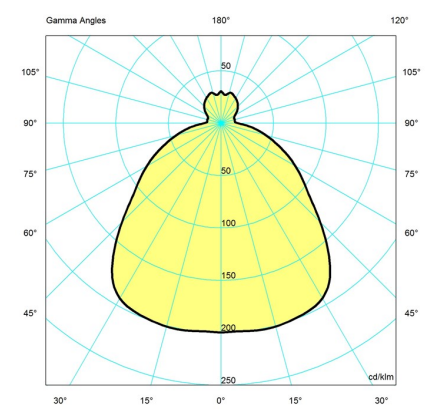

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5741939590	3x10W G16.5/IF Candelabra US	120V	1025	-	Black fabric cord

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5741939590	HIGH LUSTRE CHROME PLATED, 900	23.5 / 21.7 / 23.5 IN / 6.7 LB