


PH 3-2½ BOLLARD


PH 3-2½ Bollard - 5747293447

The fixture is designed based on the principle of a reflective three-shade system, which directs the light downwards. The shades have a matt white painted interior surface, diffusing the light in a comfortable way.



Poul Henningsen

The very influential Danish designer, architect, writer, and cultural critic, Poul Henningsen (1894-1967), has had a huge impact on Danish thinking and design. His legacy is an integrated part of Louis Poulsen's endeavor to shape light.

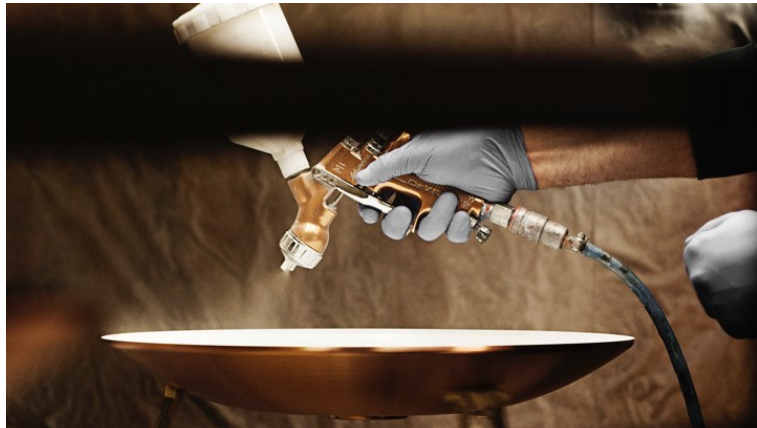

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Earth anchor to be ordered separately. Anchor bolts to be sourced locally.

Mounting

Terminal block: 1x5x2.5mm². Terminal block positioning: In post. Cable entries: 2x bottom entries Ø 17mm. Looping: Approved, max. 5x2,5mm². Post w/base plate for surface mounting: H: 909mm incl. fixture head. Post dia. 32mm.

Finish

Black, powder coated.

Materials

Top shade: Spun stainless steel. Middle/lower shade: Spun stainless steel. Shadeholder: Form pressed glass. Post: Stainless steel.

Sizes and weights

Width x Height x Length (mm) | 283 x 909 x 283 Max 3.4 kg

Class

Ingress protection IP44. Electric shock protection I.

Specification notes

The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On www.louispoulsen.com we update a list of recommendable light sources.

Light source


1x60W E27

Information

Earth anchor to be ordered separately. Anchor bolts to be sourced locally.




Related products




PH 3-2½ Wall

Light distribution diagrams


Cartesian

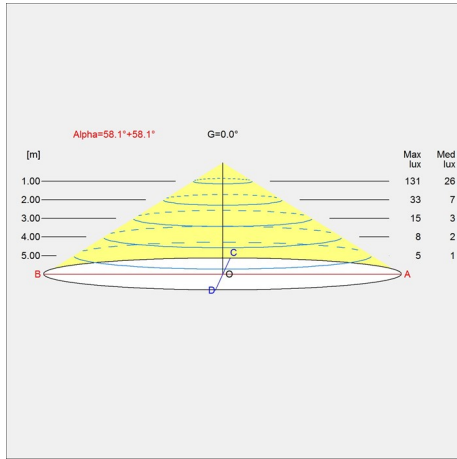

Isolux

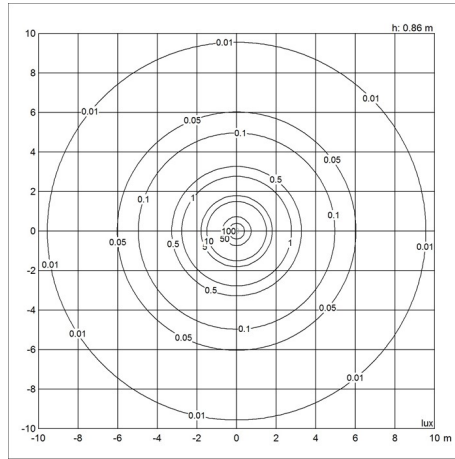

Polar

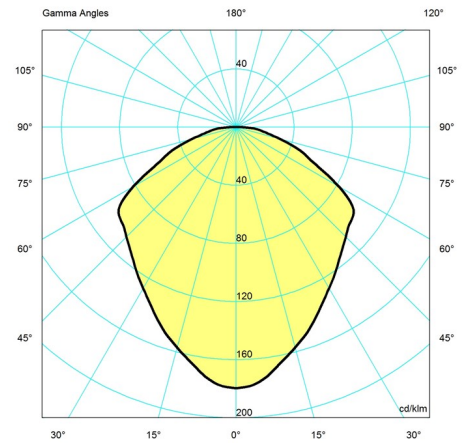

Spare parts & accessories

Product

- PH 3-2½ Bollard/Wall, 3 x black top screws
- PH 3-2½ Bollard/Wal glass
- PH3-2½ BOL/TOLDBOD BOLEARTH ANCHOR NEW

Variant number

- 5747293405
- 5747293418
- 5747293696

Data specifications

Colour	Black	Length	283
Width	283	Height	909
IP class	44	IK class	-
Class	I	Net Weight	3.4
Wind Load (m2)	-	Standby (W)	-
Power Factor (P = 100 % / P = 50 %)	-	Inrush Current	-
Light source	1x60W E27	Kelvin	-

PH 3-2½ Bollard

CRI	-
Lumen	349
Efficacy	6
Min. Dim Level (%)	-
BUG Rating	B0 U0 G0
Driver life	-

SDCM	-
Watt	60
Light control	-
Surge Protection	-
L80B50 (hours)	-